

PowerWalker VI 3000R

Line-Interactive UPS

3000VA Line-Interactive UPS

Rack Design with LED status display


9 IEC Outlets, Dry out contacts, EPO function, RJ11/RJ45

USB & RS-232 Connection for monitoring

Optional: SNMP module, MBS, ATS, RBS,
Rack installation kit, Battery Pack



Item-No. 10120022

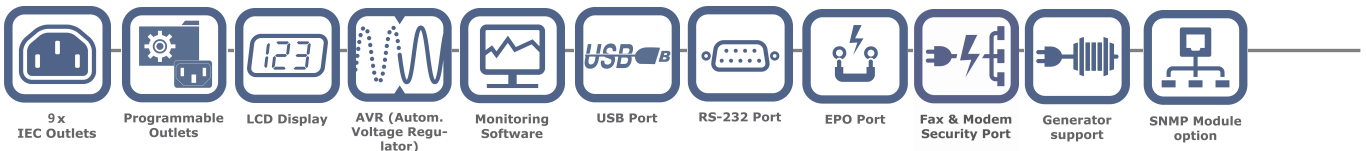


Product Features

PowerWalker VI 3000R is a Line-Interactive UPS with pure sine wave output and designed for fulfilling high quality power protection demand. It offers full protection for devices such as servers, network/telephone communication systems as well as for industrial applications.

With its slim design it only requires 2U valuable space of your rack system. The UPS can be installed in 19" rack systems.

- Pure sine wave output
- Monitoring software included
- High Frequency Topology
- 50/60 Hz frequency converter mode
- Selectable Line Sensitivity
- Programmable power management outlet
- Emergency power off (EPO) function
- Intelligent fan control for reduced noise level
- Smart battery charger to extend battery life
- Optional: Rack installation kit, SNMP module, Battery Pack, MBS, ATS, RBS

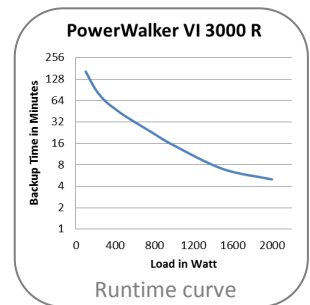

Technical Details

Product Features

Capacity	3000VA/2100W
----------	--------------

Input

Voltage	220/230/240VAC
---------	----------------

Acceptable Voltage Range	0-300VAC
--------------------------	----------

Line Low Transfer (Wide Mode)	154/161/168VAC \pm 4%
-------------------------------	-------------------------

Line Low Transfer	176/184/192VAC \pm 4%
-------------------	-------------------------

Line Low Comeback	186/194/202VAC \pm 4%
-------------------	-------------------------

Line High Transfer	264/276/288VAC \pm 4%
--------------------	-------------------------

Line High Comeback	254/266/278VAC \pm 4%
--------------------	-------------------------

Frequency Range	50/60Hz \pm 5% for normal mode; > 40Hz for generator mode
-----------------	--

Surge Rating (LV/HV)	500/640 Joules
----------------------	----------------

Output

Voltage	220/230/240VAC
---------	----------------

Voltage Regulation	\pm 5% RMS for entire battery voltage range
--------------------	--

Frequency	50 or 60Hz
-----------	------------

Frequency Regulation	\pm 0,1 Hz (Battery Mode)
----------------------	-----------------------------

Waveform	Pure Sine Wave
----------	----------------

Overload Rating

Line Mode	110-0%, \pm 8%; shutdown after 3min. 150-0%, \pm 10%; shutdown after 10 cycles
-----------	---

Battery Mode	110% \pm 6%; shutdown after 30sec. 120% \pm 6% ; shutdown after 5 cycles
--------------	---

Transfer Time

Typical	2-4ms Typical, 6ms max; 13ms max. for generator mode
---------	---

Battery

Type	12V / 5Ah
------	-----------

Quantity	8
----------	---

Recharge Time	3h to 90% after discharged
---------------	----------------------------

LED status display

LCD Indicators	UPS status, Battery level, AC mode, battery mode, fault conditions, overload, low battery, battery replacement
----------------	--

Audio Indicators

4 Modes	See manual for details
---------	------------------------

Connections

Connection	USB, RS-232 incl. dry-out contacts
------------	------------------------------------

Outlets	1x IEC C19, 8x IEC C13 (programmable)
---------	---------------------------------------

Intelligent Slot	Yes
------------------	-----

EPO	Yes
-----	-----

Surge Protection	RJ11/RJ45 (in/out)
------------------	--------------------

Software & System Requirements

Software	WinPower
----------	----------

Operating System	For details visit: http://www.powerwalker.com/winpower.html
------------------	---

Product Details

Dimensions	438 x 582 x 86 mm
------------	-------------------

Colour	Black
--------	-------

Weight	31.5kg
--------	--------

Fan Control	Always on, automatic speed control
-------------	------------------------------------

Noise Level	< 45dB
-------------	--------

Model Code	VI 3000R
------------	----------

Environment

Temperature	0°C – 40°C
-------------	------------

Humidity	0 - 90% (non-condensing)
----------	--------------------------

Package Content

Package Content	PowerWalker VI 3000R, Rack ears, Input Power Cord, 2x IEC cable, USB and RS-232 cable, Software CD, manual
-----------------	--

Optional Accessories

SNMP/NMC Module	Item-No.: 10120517
-----------------	--------------------

Rack installation Kit	Item-No.: 10120529
-----------------------	--------------------

Battery Pack	Item-No.: 10120210
--------------	--------------------

MBS, RBS, ATS	For Item-Nr. visit our website
---------------	--------------------------------

Logistic Data

Giftbox Language	EN
------------------	----

Manual Language	EN
-----------------	----

Dimension/Giftbox	720 x 626 x 236 mm
-------------------	--------------------

Weight/Giftbox	40kg
----------------	------

Pieces/carton	1
---------------	---

Pieces/palette	16
----------------	----

BlueWalker Item-No.	10120022
---------------------	----------

EAN	4260074973624
-----	---------------

Warranty	24 Months (except battery)
----------	----------------------------

See UPS configurator on www.powerwalker.com for detailed backup time information.

Version: EN 03/05/2012

We reserve the right for technical changes and mistakes